



Conn.1 HDMI A Type Male Molding


Tabel:

Length	Part No
500±30mm	AK3675
1000±30mm	AK3676
1500±30mm	AK3677
2000±50mm	AK3678
3000±50mm	AK3679

Conn.2 HDMI A Type Male Molding



Pin Assignment

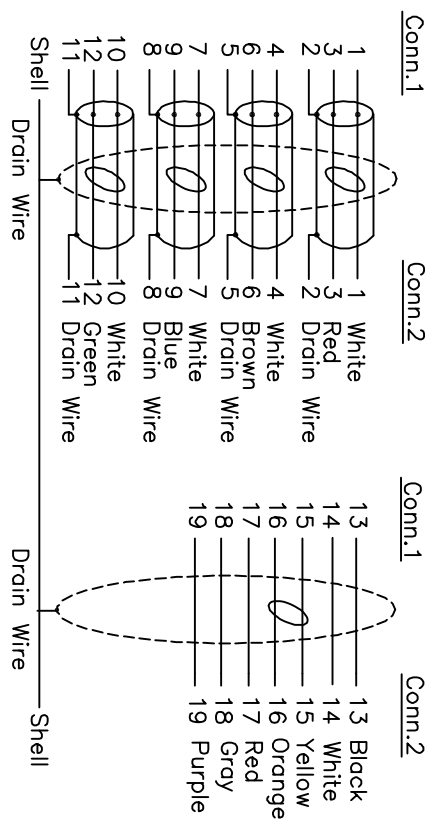

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:250V DC/10ms

④	Outside Molding:45P PVC PMS:Black	20	9
③	Inside Molding:PE	3	9
②	HDMI 19P Male Pin Gold Plated, Shell Gold Plated Insulation:Black	2	pcs
①	HDMI Cable UL20276 [30AWG(7/0.10TC)*1P+DW (7/0.10TC)+AL/Mylar]*4C+30AWG(7/0.10TC)*1P+30AWG (7/0.10TC)*5C+ADB OD5.5±0.2MM Color:Black	1	pcs
NO.	DESCRIPTION	Q'TY	UNIT

REV.	TOLERANCE INCHES M/M	DESCRIPTION	DATE
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY	Henry	CUSTOMER NO.:	
CHECK BY		SCALE	NONE
APPD BY		UNIT	MM
DATE	10.06.18	DRAWING NO.:	REV. A

RoHS Compliant